




APN INSTALLATION AND SETUP


For VEII Activated Verizon/Kajeet Modems on Windows® 10 OS

INSTALL THE MODEM

- 1 Stick the modem body to the inside of the Kiosk cabinet. Try to stay near the top away from the power switch box. Also, do not attach to the inside of the door.

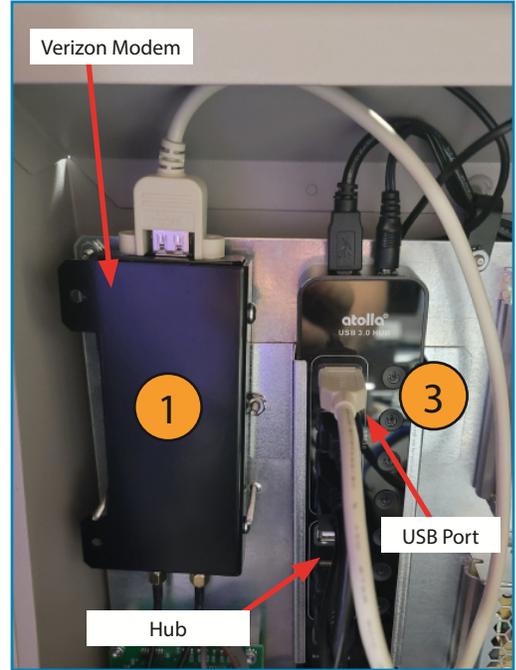


- 2 Unscrew the antennas from the modem and run them through the holes in the top of the Kiosk body. You may have to remove factory plugs that close the predrilled holes. Once through, reconnect the antennas to the modem. Do not over tighten the connectors. NOTE: The antennas are the same and it does not matter what connector they are attached to.

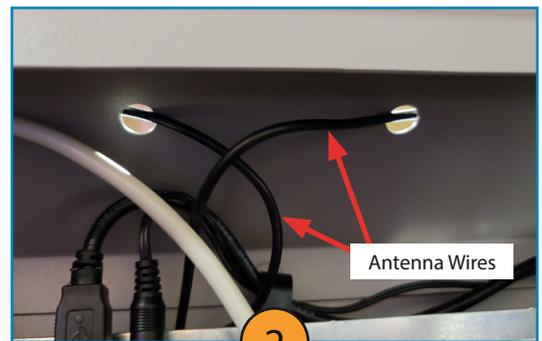

- 3 Connect the USB to an open port on the hub in the back of the cabinet.

- 4 Once installed, close the cabinet and wait 5 minutes for the modem to activate and reset on the cellular network.

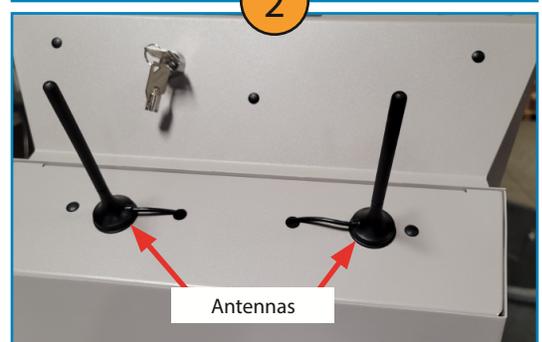

GO TO SETUP MODEM INSTRUCTIONS ON PAGE 2



APN INSTALLATION AND SETUP

For VEII Activated Verizon/Kajeet Modems on Windows® 10 OS

KIOSK OVERVIEW




- A** MAIN TOUCHSCREEN
- B** BILL READER
- C** US Connect NFC READER


SET UP THE MODEM

- 1** On the screen shown at the right, tap 5 times quickly on the clock located on the top left of the screen.

This opens the Service Menu Login Screen.

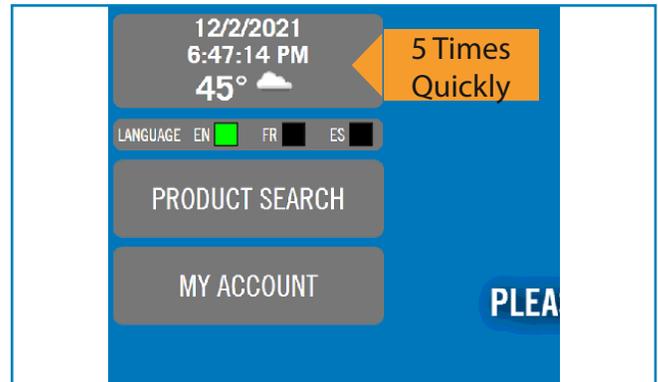

- 2** Next, when the login screen opens (image at right), type in your assigned password to access the Service Menu Screen. The default password is 8700

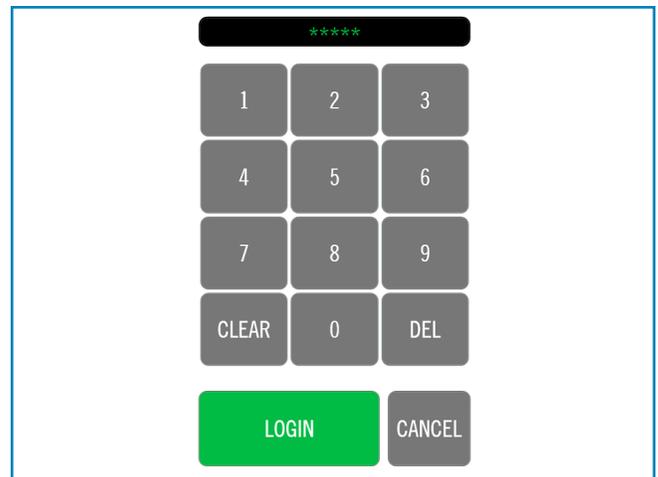

(Continued on next page)



APN INSTALLATION AND SETUP


For VEII Activated Verizon/Kajeet Modems on Windows® 10 OS

SETUP THE MODEM (continued)

3 Next, when you are at the service screen, click on the Administrative Menu bar located at the bottom of the screen as shown at right.




4 Then, when login screen opens, type your assigned password to access the Administrative Menu screen as shown. The default is 12345.

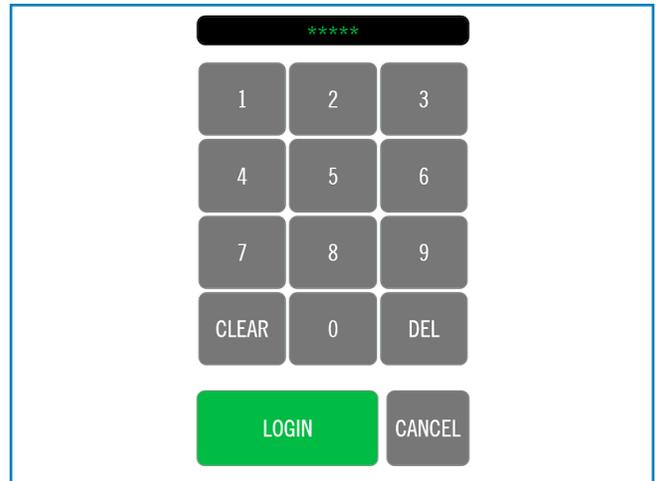

5 Next, once the admin menu opens, click Logout located on the right side of the screen.



6 Then, when the computer logs you out, look down in the lower left hand of the windows screen and select the Administrator account to log on to.

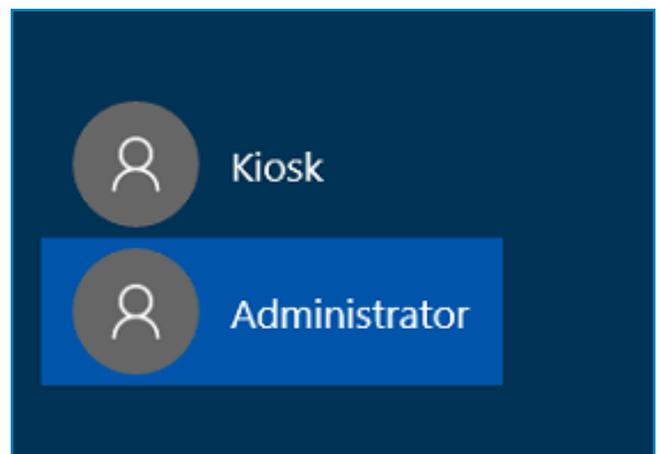

(Continued on next page)




APN INSTALLATION AND SETUP


For VEII Activated Verizon/Kajeet Modems on Windows® 10 OS

SETUP THE MODEM (continued)

- 7 Then, in the dialog box under administrator, type veii1234 for the user password.

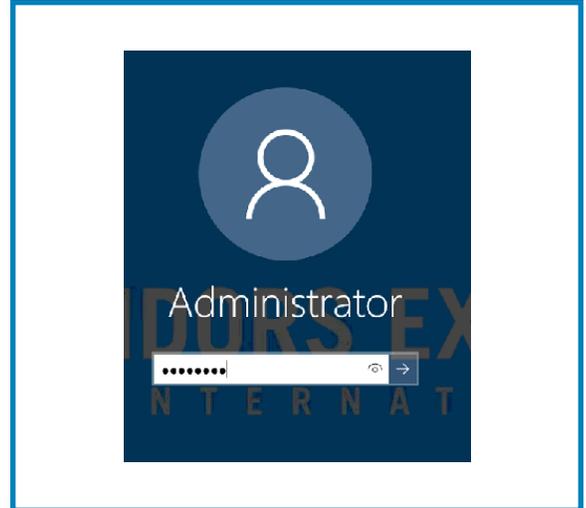

- 8 Next, when you log in, click the Windows® search icon (A), then type cellular (B), then select Change Cellular Settings (C).

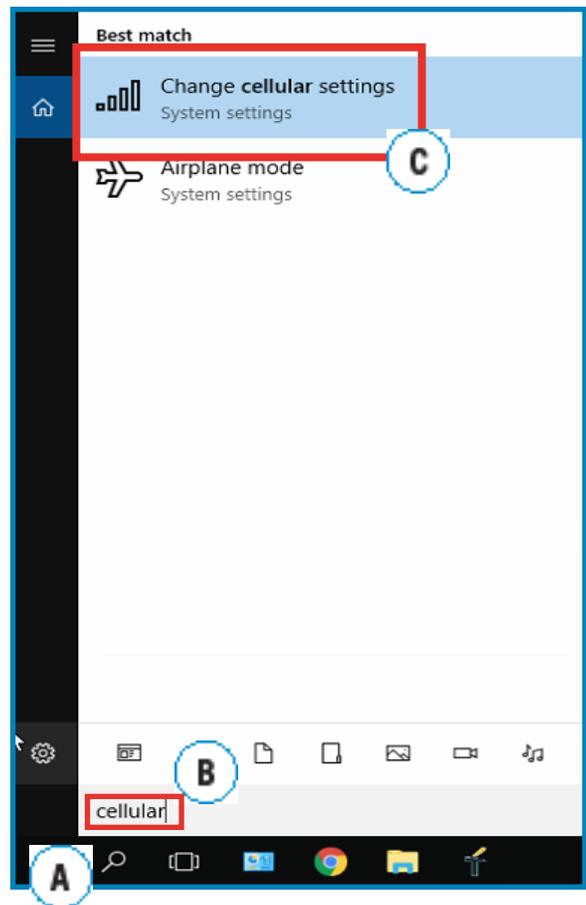

(Continued on next page)




APN INSTALLATION AND SETUP


For VEII Activated Verizon/Kajeet Modems on Windows® 10 OS

SETUP THE MODEM (continued)

- 9 Then, in the middle of the screen, click on Verizon Wireless (LTE), then select Advanced Options (see arrow).

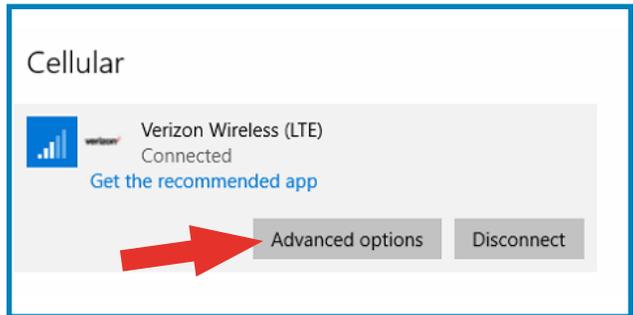

- 10 Next, in the Verizon Wireless (LTE) screen, select Add an Internet APN by clicking the + icon (see image).

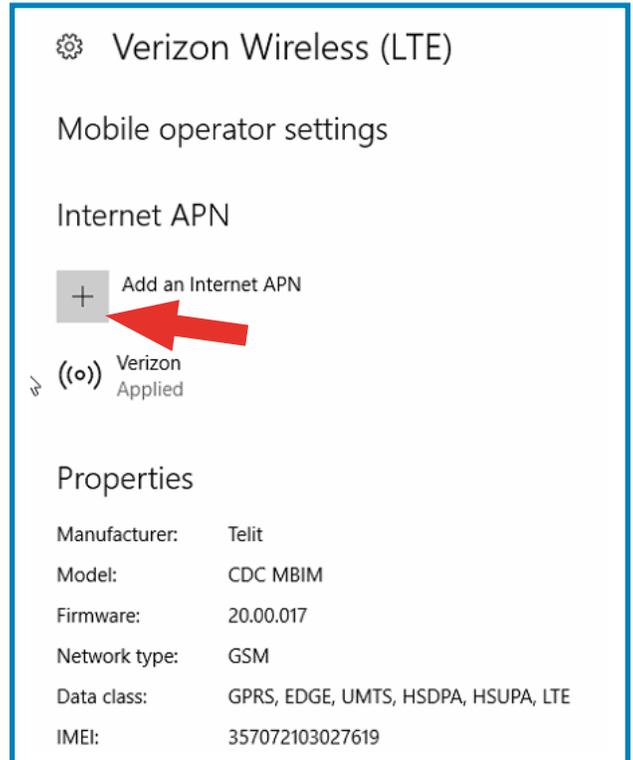

(Continued on next page)



APN INSTALLATION AND SETUP

For VEII Activated Verizon/Kajeet Modems on Windows® 10 OS

SETUP THE MODEM (continued)

- 11 Make the following entries once these selections are open:

Fill in the profile name: (Verizon)
APN fields: (kajeet.gw12.vzwentp).

Confirm by checking that Apply this Profile is checked, then click Save to save the profile.

Internet APN

Profile name
Verizon

APN
kajeet.gw12.vzwentp

User name
[]

Password
Password

Type of sign-in info
None

IP type
Default

Apply this profile

Save

- 12 Once saved, select OK on the blue pop-up banner.



- 13 When the blue banner closes, you need to click the back arrow to return to the Advanced Cellular Settings screen. (See page 5)

Settings

Internet APN

Profile name
Verizon

APN
kajeet.gw12.vzwentp

(Continued on next page)



SETUP THE MODEM (continued)


14 Before closing the settings screen, verify that the new APN settings are applied. If not, repeat the previous steps or call for assistance.

15 Click on the X on the top right corner of the dialog box and close Settings to return to the desktop.




16 Unplug the modem USB for 10 seconds in order to re-boot it. Wait till it turns back on (could take a minute) before proceeding to the next step.


17 To start the cellular connection, click on the Network Icon located as shown in the lower right corner of desktop near the time clock.

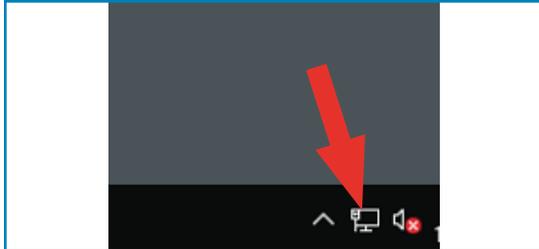



19 The Verizon Wireless (LTE) connection will expand. Confirm that Connect Automatically is checked and that the Allow Roaming is not. Then click Connect.

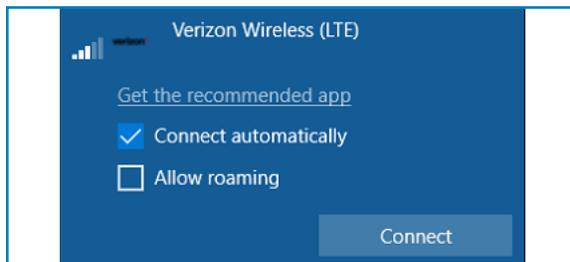

18 Once it opens from the task bar, click on the Verizon Wireless (LTE) network connection.

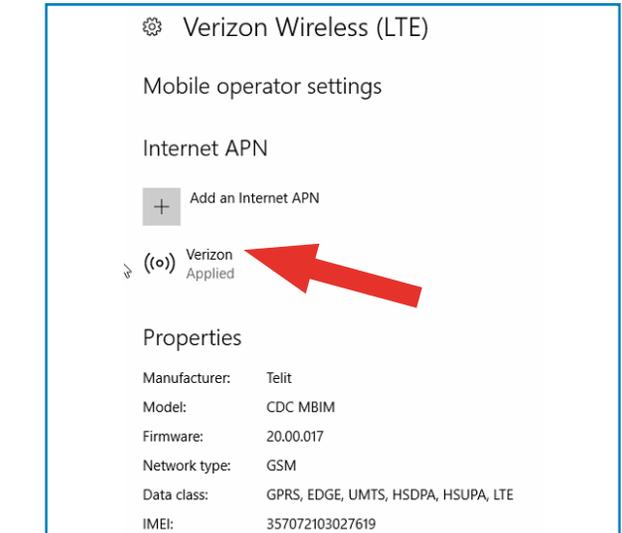

20 After a second or two, you should see Connected as shown below.

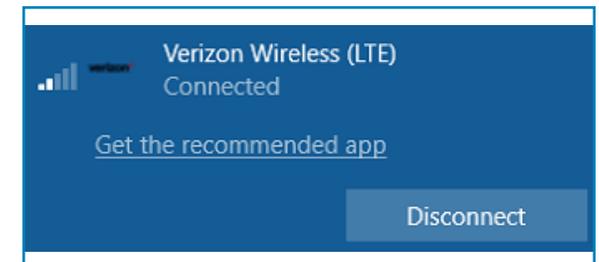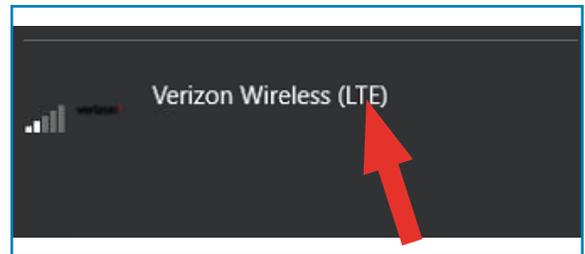

If it does not connect, please contact Kevin Weeden at 312-219-5353 or VE support at the below number.

